


TSBC-SW Session Border Controller

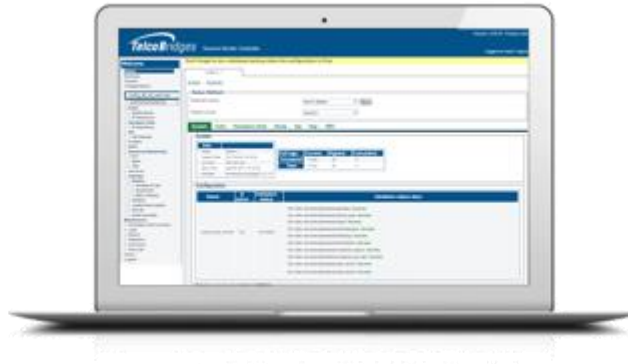

The TelcoBridges **TSBC-SW** is a carrier-grade session border controller designed for Network-to-network interface (NNI SBC), peering and access functions (access SBC).

Scalable from 100 to 60,000 sessions, the TSBC-SW software SBC is a flexible solution that can be installed seamlessly onto general purpose servers, virtualization platforms and TelcoBridges' certified servers giving access to an extensive set of call routing, network adaptation and policing features. Provided with TelcoBridges' TB Analytics integrated troubleshooting tools and field-proven SIP stack deployed in more than 100 countries, the TSBC-SW is the ideal choice for VoIP service providers handling small to large traffic loads.

Product Characteristics:

- ✓ Back-to-back user agent (B2BUA)
- ✓ Line rate DOS/DDOS protection (64 bytes packets)
- ✓ Up to 60,000 simultaneous signaling and media sessions (with no transcoding) or up to 30,000 sessions (with all channels transcoded)
- ✓ Flexible and extensive routing capabilities
- ✓ Integrated network troubleshooting tools (traces, media/signaling recording, test call generation, etc)
- ✓ Installable on physical servers and virtualized environments
- ✓ Easy to deploy, operate and manage

TSBC-SW Data Sheet

TelcoBridges Inc.
91 de la Barre, suite 01
Boucherville, QC
J4B 2X6, CANADA

Sales +1.450.655.8993
TB Support +1.866.438.4703

info@telcobridges.com
sbc.telcobridges.com

Network function

Back-to-back user agent (B2BUA)
Overlapping IP realms
SIP registration pass-through and offloading

IP Network Security

Topology hiding
Line-rate DOS/DDOS protection (64 bytes packets)
Rogue RTP detection
Dynamic blacklisting
Access control list (ACL)
Session admission control
Session bandwidth control
Call access based on successful registration

Interoperability Functions

Extensive SIP header manipulation
Error/cause code adaptation
Local and remote NAT traversal adaptation
SIP to SIP-I interworking
SIP UDP/TCP interworking

Transcoding and Media Adaptation (Using external TSBC-HW-TRANS)

DTMF transcoding (inband, INFO, RFC2833/4733)
T.38 fax and video relay
T.38 V.17 & V.34 fax conversion to pass-through
NSE and VBD conversion
Transcoding unit IPs invisible from WAN/LAN
Media transcoding:
G.711, G.723.1, G.726, G.729ab, G.729eg,
Clear mode (RFC 4040), G.728, iLBC,
G.722, AMR-NB, G.722.2 (AMR-WB),
GSM FR/EFR, T38

Voice services

(Using external TSBC-HW-TRANS)

Call progress tones
Announcement prompts playback
Call recording

TB Routing (routing and policy)

Least cost routing
Scheduled routing
Class IV routing
Load-balancing and percentage routing
Routing customization through scripts
SIP REFER/3xx based routing
RADIUS based routing
Routing alternate retry routes
Digit/From/To matching and manipulation
Call blocking
Loop detection and prevention

Quality of Service

Per session network quality analysis
Per session statistics
DSCP/TOS marking

Management Capabilities

Provisioning and status graphical interface (GUI)
HTTPS secured transport
CLI interface for local and remote management
RESTful northbound provisioning and status API
Level-based user access
Configuration change audit logging
SSH, sFTP, NTP, DNS, DHCP
SNMP v2, v3 GET, TRAPs (alarms)
Extensive SNMP call statistics MIBs
Configurable Call-detail-records (CDRs)
Local text customizable format
Customizable RADIUS accounting

TB Analytics (network analytics)

Live session trace with protocol information (ladder)
Raw signaling protocol capture (pcap format)
Live test call with RTP (silence) media

(Using external TSBC-HW-TRANS)

Live test call with media playback (and recording)
Live media call recording with selectable targets

Supported platforms

Bare-metal 64 bits capable servers (iso image)
 OpenStack with KVM hypervisor (qcow2 image)
 Vmware 5/6 with vSphere hypervisor (ova image)
 TSBC-HW-SRV-HIGH
 TSBC-HW-SRV-MID

High Availability & Redundancy

1+1 redundancy support (active/standby)
 Ethernet port bonding support
 Fault-tolerant software
 Seamless software upgrade

Regulatory

Lawful interception (ETSI 201 671)
 Emergency routing

Performance

Metrics	Hardware platforms	
	TSBC-HW-SRV-HIGH	OpenStack KVM ¹
Max. nb. of concurrent sessions (no transcoding)	60,000	16,000
Max. nb. of concurrent sessions (with 100% transcoding)	30,000	8,000
Max. nb. of completed sessions per seconds (CPS/CSPS)	1,000	600
Max. nb. of sessions attempts per seconds (CAPS/SAPS)	4,000	2,400
Max. nb. of registration per seconds (RPS)	5,800	3,400
Max. nb. of registration refresh per seconds (RRPS)	23,000	13,800
Max. nb. registered devices ²	350,000	350,000

- (1) As tested on TelcoBridges-installed 'OpenStack Newton' executing on Dell R410 (2.93GHz) with 4 vCPUs (directly pinned to pCPUs), 16GB RAM and SR-IOV access to one Intel X710DA-2 (10GE) SFP+ optical interface.
 (2) With one contact per address-of-record (AOR)

Fill out the form at sbc.telcobridges.com
 to get a TSBC-SW download image

© 2017 TelcoBridges Inc. All rights reserved.
 The TelcoBridges logo is a registered trademark of TelcoBridges Inc.
 This document and any products or functionality it describes are
 subject to change without notice. Please contact TelcoBridges for
 additional information and update. Last update: May-11-17